



The *PERECT* way  
to keep water AWAY


*Introducing*  
**The Natural Water  
Repellent**

**Water Guard 501** is silicone based completely transparent liquid. It forms thin invisible film on the walls of capillaries of concrete and acts as a 100% water repellent.

Technical information about **Water Guard 501** and its action of repelling capacity:

Whenever **Water Guard 501** is applied on the porous surface of the wall, due to its very slow low surface tension, it gets spread on the surface and form is very thin transparent and tenacious water repellent film on each capillary pore out of billions of capillaries on vertical wall.

**Water Guard 501** does not seal the capillary passage required for respiration of wall. The keeping breathing function of wall constant (ultimately dampness of wall is prevented).

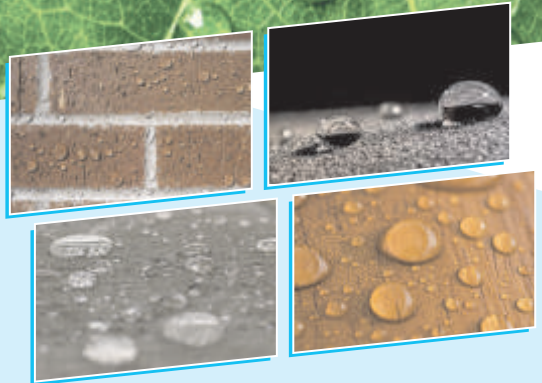

Available in  
500 ml, 1 Ltr. & 5 Ltrs.

From the makers of  
**WOOD GUARD**  
Timber & Plywood Tonic





**Bricks Works**



**Religious Building**



**Modern Mansions**



**Ancient Architecture**

# Ideal for

- Being transparent, maintains original colour.
- Prevents growth of algae and fungus.
- Stops ageing of the building.
- Smooth film formed, aids thermal insulation.
- Prevents salt efflorescence, chemical erosion.



**Water Repellent Solution**

Can be used on plastered wall, all types of porous stones, bricks, roof tiles, asbestos sheets, etc.

**Now no more**

**Ageing**



**Algae**



**Efflorescence**



### Directions for use

Fill all the visible cracks with any cracks seal compound. Clean the surface completely. Apply **Water Guard 501** with brush and spray gun. Maintain rundown at least 12 inches. Use liberally. Don't expose to water for at least 24 hours to form film. 1 ltr. **Water Guard 501** covers approx 120 Sqft. surface.

*The storage and use of the product is beyond our control. The manufacturer does not hold any warranty or responsibility or reliance for wrong usage or application of the product.*

**Water Guard** is to be applied only on vertical walls is not on horizontal slabs. For best results in all visible cracks and crevices with any cracks seal compound.



Authorised Dealer

A quality product from

**MCPL**  
Malabad Chemicals Pvt. Ltd.

NH-4, Shirol, Kolhapur-416122.  
e: malabad.chemicals@gmail.com  
Customer Care Number : 9960077676



[www.mcplproducts.in](http://www.mcplproducts.in)